LPB Range

Low Profile Antenna

12/03/2012 v1



- Rugged low profile design
- Excellent bandwidth


The Panorama LPB low profile antenna range has been designed to perform under extreme pressure. At only 82mm (3.22") high and protected by a robust high impact radome the antenna is almost impervious to daily wear, tear and impact.


The LPB offers excellent performance across a wide bandwith. Mounted on a 400 x 400mm groundplane the LPB covers public safety / LTE frequencies across 700 and 800MHz as well as all global cellular frequencies from 698-960 MHz and 1710-2700MHz making it an extremely versatile product.

Supplied with a convenient adhesive pad and either a short pigtail for connection to a cable extension or an integrated 5m low loss cable run the antenna is cost effective to install and adaptable to any install environment.

Technical Drawing

(Nominal measures)

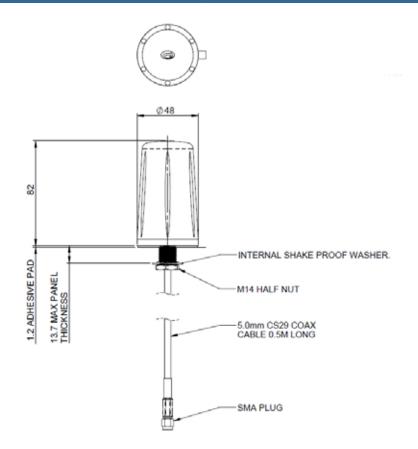

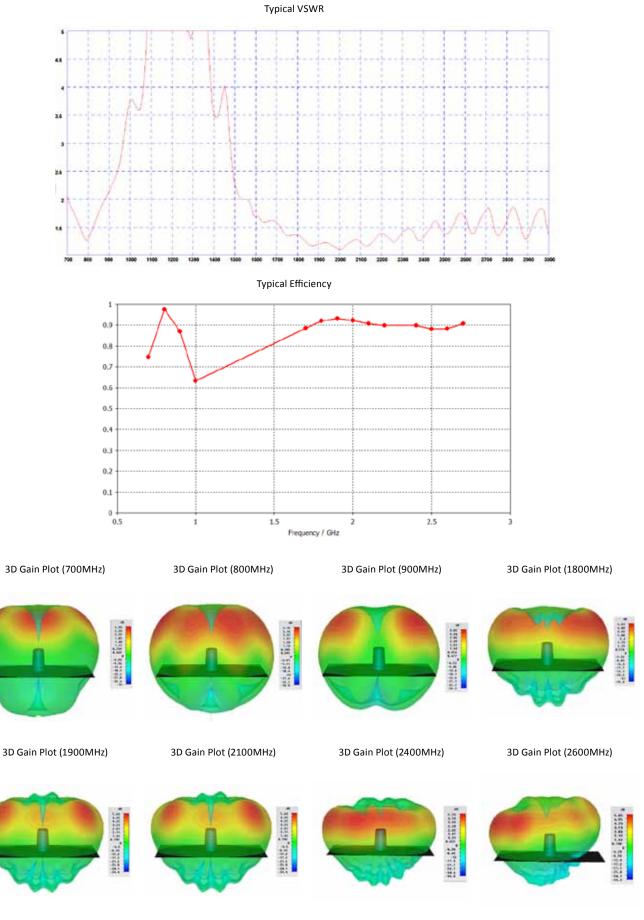

Part No.					
		LPB-7-27-05SP	LPB-7-27-5SP	LPB-7-27-5F	
Electrical Data					
Frequency Range (MHz)		698-960 / 1710-2700			
Operational Band		700/800/900/1800/1900/2100/ 2400/2600			
Peak Realised Gain: Isotropic	700 MHz	3dBi			
	800 MHz	3dBi			
	900 MHz	4dBi			
	1800 MHz	4dBi			
	1900 MHz	5dBi			
	2100 MHz	5dBi			
	2400 MHz	5dBi			
	2600 MHz		5dBi		
VSWR		<2.5:1			
Polarisation		Vertical			
Pattern		Omni-directional			
Impedance		50Ω			
Max Input Power (W)		30			
Mechanical Data	1				
Dimensions (mm)	Height	82 (3.22")			
	Diameter	48(1.89")			
Operating Temp (°C)		-40° / +80°C (-40° / 176°F)			
Material		High Impact UV Stable ABS			
Colour			Black		
Mounting Data					
Fixing			Panel mount		
Hole Diameter (mm)		14 (0.5")			
Max Panel Thckness (mm)			13 (0.5")		
Cable Data					
Туре			5mm low loss coax		
Diameter (mm)			5(0.19")		
Length (m)		0.5(19.6")	5(16′)	5(16′)	
Termination		SMA plug	SMA plug	FME plug	



Panorama Antennas Ltd

Frogmore, London, SW18 1HF, United Kingdom

T: +44 (0)20 8877 4444 F: +44 (0)20 8877 4477 E: sales@panorama-antennas.com www.panorama-antennas.com

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice.